

Features



The microprocessor control is simple to use and features programmable time and temperature settings.



A reversing motor system gently tumbles the goods in both directions to prevent tangling.



Access to the lower lint screen panel is simple making quick work for filter maintenance.



Loading door features a tempered glass window which allows for a visual check of the goods during the cycle. The door opening is oversized to allow for easy loading and unloading.



Protective 304 grade Stainless Steel cabinet.



Available with gas burner (GRZ), steam (GZZ) or electric (GDZ) heating.

www.sealionamerica.com

Commercial Dryer



GZ series stand alone auto dryers from Sea-lion are used to prepare various types of garments for the ironing and folders finishing.

Designed to have the perfect balance of CFM airflow and heat transfer for optimal drying.

Fitted with an ultra smooth and durable 304 grade mirror Stainless Steel drum to protect goods.



Models available in 25kg, 50kg and 100kg dry load capacity.



**Air Flow & Heating
Balanced**

Specifications

Description	unit of measure	GZZ(GDZ)-25	GZZ(GDZ)-50	GZZ-100	GZZ-100Q
Rated capacity (dry load)	kg/lb	25/55	50/110	100/225	100/225
Inner drum x length	mm	930 x 819	1160 x 995	1460 x 1236	1460 x 1236
Main Motor power	kW	0.75	1.5	3	3
Fan	kW	0.75	1.5	2 x 1.5	2 x 1.5
Drum speed	rpm	32	32	30	30
Steam pressure	MPa	0.5-0.6	0.5-0.6	0.5-0.6	0.5-0.6
Steam pipe	DN	25	25	25	40
Steam Return pipe	DN	25	25	25	25
Steam consumption/cycle	kg	25-30	50-60	100-120	100-120
Electric consumption/cycle Electric	kW	15	29	-	-
Electric consumption/cycle Steam	kW	0.52	1.8	3.2	3.2
Heater power	kW	- / (23.4)	- / (43.2)	- / (80)	-
Dimension of air exhaust	mm	260 x 240	280 x 350	330 x 400	330 x 400
Dimension (L/W/H)	mm	1415/1040/1780	1620/1282/2150	1880/1605/2420	2100/1660/2625
Weight	kg	452 (460)	640 (690)	1340 (1500)	1548
Description	unit of measure	GRZ-25	GRZ-50	GRZ-100	
Rated capacity (dry load)	kg	25/55	50/110	100/225	
Inner drum x length	mm	930 x 819	1160 x 995	1460 x 1236	
Main Motor power	Kw	0.75	1.5	3	
Fan	Kw	0.75	1.5	2 x 1.5	
Gas pressure	Mpa	0.005-0.02	0.005-0.02	0.005-0.02	
Gas pipe	DN	15	15	15	
Dimension of air exhaust	mm	260x240	280x350	330x400	
Gas consumption	Kg/h	3	4.5	10	
Air flow	M ³ /min	30	50	100	
Dimension (L/W/H)	mm	1400/1040/1700	1570/1282/2070	1880/1605/2500	
Weight	Kg	550	800	1250	



Machines are certified to following standards:
 2006/42/EC Machinery Directive
 2014/35/EU Low Voltage Directive
 2014/30/EU Electromagnetic Compatibility Directive
 EN ISO 10472-1:2008;EN ISO 10472-4:2008
 EN ISO 12100:2010;EN 60204-1:2006+A1:2009
 EN 61000-6-4:2007+A1:2011;EN 61000-3-2:2014
 EN 61000-3-3: 2013;EN 61000-6-2:2005



Some new models, including existing models that are in the process of being revised, may not be certified at the time of production. Consult factory for available certifications.
 6/2022



GZ:22

SEA-LION




- Sea-lion America Company
- P.O. Box 1063
- Westbrook, CT 06498
- Phone: (860) 316-5563
- Email: sales@sealionamerica.com

Product details and machinery specifications are based on the latest information available at time of printing. Sea-lion America Company and Jiangsu Sea-lion Machinery Co., Ltd. reserve the right to change prices and specifications without notice.




Parameters

Product details and machinery specifications are based on the latest information available at time of printing. Sea-lion America Company and Jiangsu Sea-lion Machinery Co., Ltd. reserve the right to change prices and specifications without notice.

GZZ-25
GZZ-50
GZZ-100

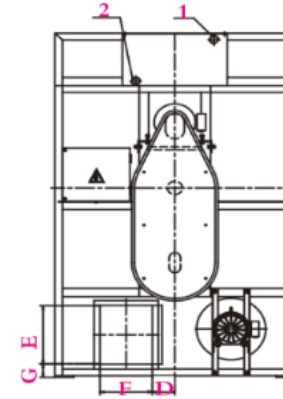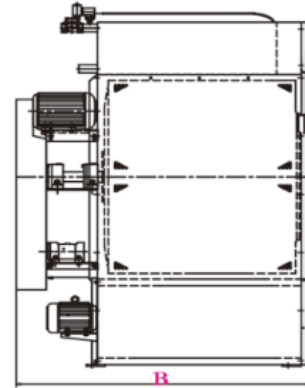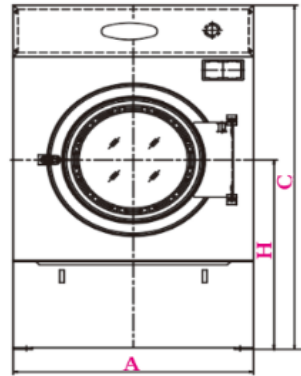

GZZ-100Q

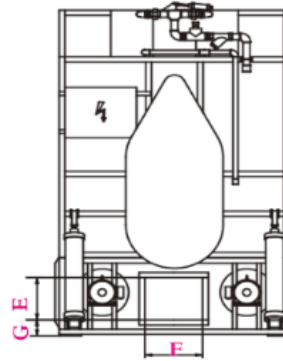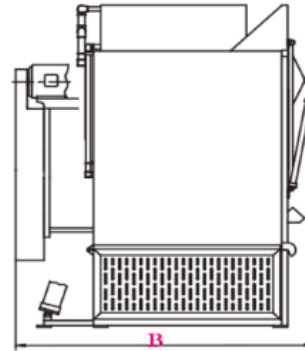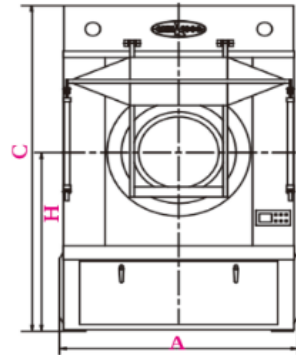

FRONT

SIDE

REAR

Model	A	B	C	D	G	H	ExF	1	2
							exhaust	steam inlet	steam outlet
GZZ-25	1040	1415	1780	152	74	1000	260 x 240	DN25	DN25
GZZ-50	1282	1620	2150	120	80	1140	280 x 350	DN25	DN25
GZZ-100	1605	1880	2420		130	1325	330 x 400	DN25	DN25
GZZ-100Q	1660	2100	2625		127	1405	330 x 400	DN40	DN25



®

SEA-LION