

Features



The microprocessor control is simple to use and features programmable time and temperature settings.



A reversing motor system gently tumbles the goods in both directions to prevent tangling.



Access to the lower lint screen panel is simple making quick work for filter maintenance.



Loading door features a tempered glass window which allows for a visual check of the goods during the cycle. The door opening is oversized to allow for easy loading and unloading.



Protective Stainless Steel cabinet.

Available with gas burner (GRZ), steam (GZZ) or electric (GDZ) heating.

www.sealionamerica.com

Dryer - Commercial Series



GZ series stand alone auto dryers from Sea-lion are used to prepare various types of garments for the ironing and folders finishing.

Designed to have the perfect balance of CFM airflow and heat transfer for optimal drying.



Fitted with an ultra smooth and durable 202 grade mirror Stainless Steel drum to protect goods.

Models available in 25, 50 and 100kg dry load capacity.

Specifications

	GZ-25	GZ-50	GZ-100	GZZ-100O
Rated Capacity (dry load)	25 kg / 55 lbs	50 kg / 110 lbs	100 kg / 220 lbs	100 kg / 220 lbs
Drum Diameter (mm/inch)	930 / 36.6	1160 / 45.7	1460 / 57.5	1460 / 57.5
Drum Depth (mm/inch)	819 / 32.2	995 / 39.2	1236 / 48.7	1236 / 48.7
Drum Volume (cu.meter/cu.ft.)	.056 / 19.6	1.05 / 37.2	2.07 / 73.1	2.07 / 73.1
Drum Speed (RPM)	32	32	30	30
Drum Motor (kW/hp)	0.75 / 1	1.5 / 2	3 / 4	3 / 4
Airflow (M ³ /Hr / CFM)	1500 / 883	3000 / 1766	6000 / 3532	6000 / 3532
Fan Motor (kW/hp)	0.75 / 1	1.5 / 2	2 x 1.5 / 2 x 2	2 x 1.5 / 2 x 2
Exhaust (mm/inch)	260 x 240	280 x 347	330 x 400	330 x 400
GZZ - STEAM heating				one-way tilt
Steam Inlet/Return	25DN/25DN	25DN/25DN	40DN/25DN	40DN/25DN
Width (mm/inch)	1151 / 45.3	1576 / 62.1	1969 / 77.5	2100 / 82.7
Depth (mm/inch)	1015 / 40.0	1282 / 50.5	1604 / 63.2	1600 / 63
Height (mm/inch)	1694 / 66.7	2072 / 81.6	2344 / 92.3	2560 / 100.8
Net Weight (kg/lbs)	452 / 996	630 / 1389	1190 / 2624	1548 / 3492
GDZ - ELECTRIC heating				
Heating Element (kW)	23.4	40.2	80	-
Width (mm/inch)	1151 / 45.3	1576 / 62.1	1969 / 77.5	-
Depth (mm/inch)	1015 / 40.0	1282 / 50.5	1604 / 63.2	-
Height (mm/inch)	1694 / 66.7	2072 / 81.6	2344 / 92.3	-
Net Weight (kg/lbs)	550 / 1212	682 / 1504	1260 / 2778	-
GRZ - GAS heating				
Gas Pipe	15mm	20mm	2*20mm	-
Width (mm/inch)	1415 / 55.7	1576 / 62.0	1996 / 78.6	-
Depth (mm/inch)	1040 / 40.9	1282 / 50.5	1602 / 63.1	-
Height (mm/inch)	1782 / 70.2	2197 / 86.5	2474 / 97.4	-
Net Weight (kg/lbs)	480 / 1058	750 / 1654	1500 / 3307	-

Machines are certified to following standards:
 2006/42/EC Machinery Directive
 2014/35/EU Low Voltage Directive
 2014/30/EU Electromagnetic Compatibility Directive
 EN ISO 10472-1:2008;EN ISO 10472-4:2008
 EN ISO 12100:2010;EN 60204-1:2006+A1:2009
 EN 61000-6-4:2007+A1:2011;EN 61000-3-2:2014
 EN 61000-3-3: 2013;EN 61000-6-2:2005



Intertek

Some new models, including existing models that are in the process of being revised, may not be certified at the time of production. Consult factory for available certifications.
 7/2025






- Sea-lion America Company
- P.O. Box 1063
- Westbrook, CT 06498
- Phone: (860) 316-5563
- Email: sales@sealionamerica.com

Product details and machinery specifications are based on the latest information available at time of printing. Sea-lion America Company and Jiangsu Sea-lion Machinery Co., Ltd. reserve the right to change prices and specifications without notice.




Parameters

Product details and machinery specifications are based on the latest information available at time of printing. Sea-lion America Company and Jiangsu Sea-lion Machinery Co., Ltd. reserve the right to change prices and specifications without notice.

GZZ-25
GZZ-50
GZZ-100

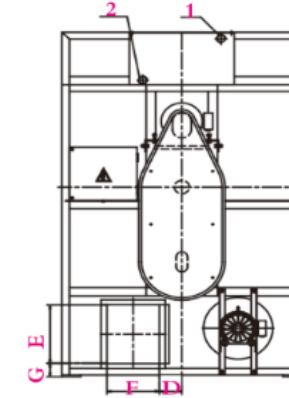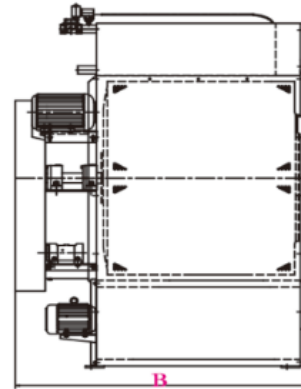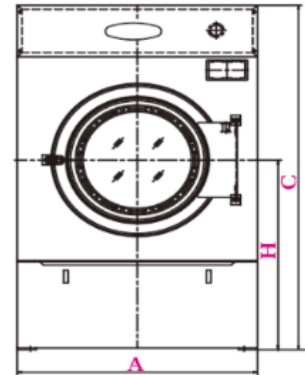

GZZ-100Q

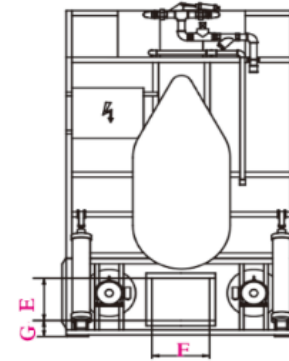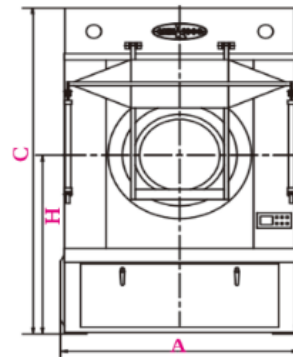

FRONT

SIDE

REAR

Model	A	B	C	D	G	H	E x F	1	2
							exhaust	steam inlet	steam outlet
GZZ-25	1015	1151	1694	152	74	1000	260 x 240	DN25	DN25
GZZ-50	1282	1576	2072	120	80	1140	280 x 347	DN25	DN25
GZZ-100	1604	1969	2344		130	1325	330 x 400	DN25	DN25
GZZ-100Q	1600	2100	2560		127	1405	330 x 400	DN40	DN25

