Features



The operating speed adjustment range is wide and can be matched with various corresponding ironing machines.




Equipped with self diagnostic function, comprehensive safety protection system, and self maintenance function for detection points.



Each control valve adopts pneumatic control, with fast and reliable action, and no pollution to the surrounding environment.

Small Piece Accumulator

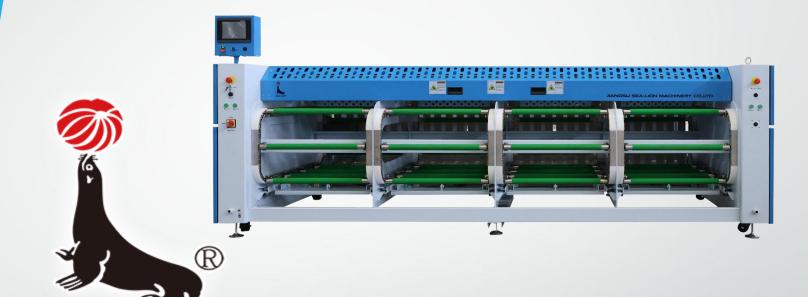

Small Piece Accumulator ZDCJ1000-600 can stack and process small piece fabrics after ironing or drying, such as napkins. The equipment can be used in conjunction with various corresponding ironing machines.

SEA-LION

ZDCJ1000-600

Specifications

ltem	Unit	Parameters
Max. folding length ×width	mm	1000×600
Min. folding length ×width	mm	400×400
Air pressure	MPa	0.6-0.8
Rated input power	Kw	0.75
Dimension (length×width×height)	mm	3905×2720×1620
Weight	kg	1848
External power cord diameter	mm²	4
Voltage	V/Ph/Hz	208-240/3/60
		440-480/3/60

Machines are certified to ETL C-US standards. Some new models, including existing models that are in the process of being revised, may not be certified at the time of production. Consult factory for available certifications.



7/2025 ZD:25









Sea-lion America CompanyP.O. Box 1063Westbrook, CT 06498

•Phone: (860) 316-5563

•Email: sales@sealionamerica.com

Installation Layout

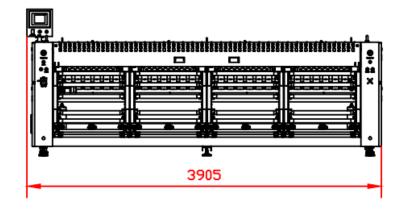



Product details and machinery specifications are based on the latest information available at time of printing. Sea-lion America Company and Jiangsu Sea-lion Machinery Co., Ltd. reserve the right to change prices and specifications without notice.

Multiple stacker discharge locations are available. Consult factory for details.

